



AUTONOMOUS DATA COLLECTOR

100% WATERPROOF

The DCX-22 is an autonomous, battery powered instrument made of stainless steel designed to record water depth (pressure) and temperature over long periods. Two versions are offered:

DCX-22 The sensor, electronics and battery are housed in a sealed stainless steel tube, for submersible deployment. For data read-out the DCX-22 must be recovered from the measurement point. The O-ring sealed end cap is then removed to access the data port.

The DCX-22 works with an absolute pressure sensor. In shallow water depths where the influence of barometric pressure changes should be considered, it is recommended that a second data collector DCX-22 (Baro) is placed at the surface, to record the barometric pressure. The PC then calculates the differential pressure resp. the water depth by subtracting the two measured values.

DCX-22 SG/VG The sensor is connected by waterproof cable to a surface mounted housing with the data read-out port. This arrangement allows for easier data recovery from fixed installations. The DCX-22 SG/VG does not have to be removed from the dip pipe for data read out. The DCX-22 SG/VG is supplied with a 2" diameter fixing plate to enable mounting at the top of the dip pipe. The sensor can be sealed gauge SG, or vented gauge VG, the cable carries the vent tube for VG version sensors, vent port in the housing is protected by a breathable Gore-Tex® membrane.

The electronics employ the latest microprocessor technology, which give high accuracy and resolution for the pressure and temperature signals from both the depth sensor and the barometric sensor. The measured values are mathematically compensated for all linearity and temperature errors of the pressure sensors. The use of a non-volatile memory ensures high data security.

The electronics housing is mounted at the top of the borehole to give easy access for data downloading. The level sensor (diameter 22 mm) is connected via a sealed cable to the bottom of the electronics housing. Installation is quick and simple, using fixing devices in various sizes, suitable for cap lock units of different manufacturers and for well access points starting from 1" (caps starting at 2" include a hole to lower a dip meter). Thus enabling measuring stations to be set up at considerably lower costs compared to conventional systems.

The modular design offers the user the two options for collecting the data. Standard design requires the user to visit the location, connect via data-cable and download data. The optional ARC-1 unit allows the transmission of data, and instructions (re-programming) to the data-collector from/to a remote location. The data can be sent to any mobile phone as a short message (SMS).


DCX-22 (SG/VG)



Version DCX-22



Version DCX-22 SG
DCX-22 VG

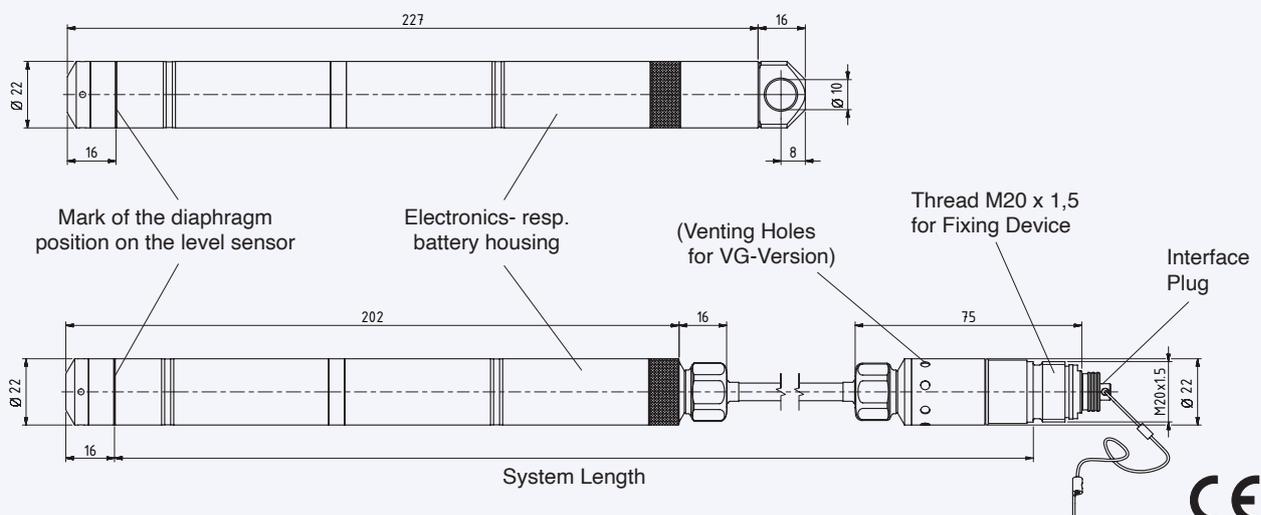



SPECIFICATIONS

Pressure Ranges	DCX-22 Baro	PAA	0,8...1,3 bar				
			10 mWC	20 mWC	50 mWC	100 mWC	
	DCX-22	PAA	0,8...2	0,8...3	0,8...6	0,8...11	bar abs.
	DCX-22 SG	PAA	0,8...2	0,8...3	0,8...6	0,8...11	bar abs.
	DCX-22 VG	PR	1	2	5	10	bar

Overpressure 2 x Pressure Range

PAA: Absolute. Zero at vacuum PR: Vented Gauge. Zero at atmospheric pressure (other ranges on request)

Supply	Lithium-Battery 3,6 V (Type AA)	Temperature Compensation	-10...40 °C (others on request)
Battery Life *	10 years @ 1 measurement/hour	Temperature Measurement	Accuracy typ. ±0,5 °C
Output	RS 485 digital	Shortest Measuring Range	1x per second
Electrical Connection	Fischer DEE 103A054	Memory	57'000 measuring values @ storage interval ≤ 15 s, otherwise 28'000 measuring values (always with attributed time)
Pressure Sensor Specifications		Material	Stainless steel 316L (DIN 1.4435) O-Ring: Viton®
Linearity	typ. 0,02 %FS	Weight: Probe	≈ 355 g (without cable)
Comp. Temperature Range	-10...40 °C (icing not permitted)	Tolerance System Length	± 2 cm
Error Band **	typ. 0,05 %FS *** max. 0,1 %FS	Options	Other pressure connections
Resolution	max. 0,0025 %FS		
Long Term Stability	typ. 0,5 mbar		

* exterior influences could reduce battery life ** Linearity + Temperature Error *** optional max. 0,05 %FS

LOGGER 5

The Logger 5 software makes it possible to configure and read autonomous KELLER data loggers. This software assists users during measurements in the field, with processing the data and also with forwarding it to partners or end customers.



Measurement data can be displayed in graphic form, exported, compensated for air pressure or converted into different units. The online function displays the current device values.

The software is included in the scope of delivery for the interface converter cables, or it can be downloaded free of charge at www.keller-druck.com.

- Supports Windows operating systems

Overview of functions: Logger 5

- Pressure and temperature channels, selectable
- Adjustable measurement interval (1s...99 days)
- Averaging with selectable number of measurements
- Recording modes:
 - continuous interval measurement
 - event-controlled recording:
 - recording starts when value is exceeded
 - recording starts when value is undercut
 - recording starts when value changes
 - combination of continuous and event-controlled recording is possible
- Adjustment of pressure zero point
- Start measurements immediately or at a set time
- Data storage: linear or ring-type memory
- Battery status display
- Online display of measuring channels
- Management of notifications and images for stations

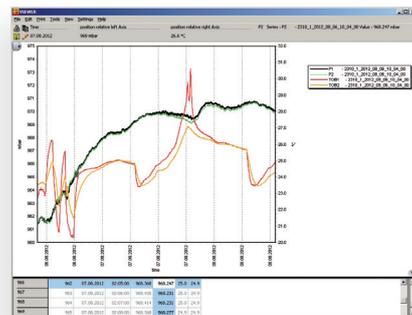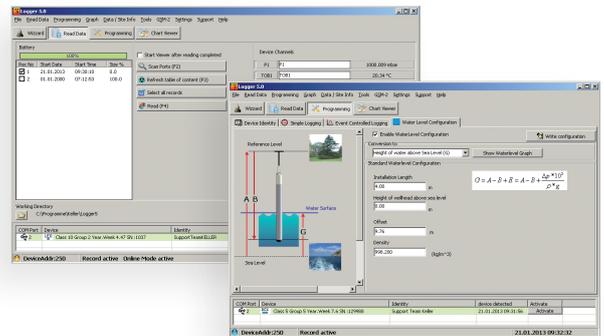

Processing and forwarding measurement data

- Graphic display of measurement data
- Simple export of measurement data and graphics (supports Microsoft Office and these file formats: CSV-1, CSV-2, XML, Hydras, TNO, Wiski, BNA)
- Generation of measurement reports
- Station information stored in SQ Lite database